Pocket Spring Machine Advanced



THE LATEST AND ADVANCED MODEL

TECMIC have released the latest and advanced model of Pocket Spring Machine, pursuing

- Shape and quality of pocket spring,
- Stable and diverse machine performance,
- Simple mechanism, operation and maintenance.







Matsushita Industrial Co., Ltd.

Characteristics

■ Stable Speed: 120 pcs/min.

■ Smart Pocket : Flat top and Flat side seal

■ Double Seal of Different Pitch: 0-30mm






- Two Solutions of Heat Treatment : user selectable
 - 1. Wire heat treatment (pre-coiling)
 - 2. Spring heat treatment (post-coiling)
- Temperature Display of

Wire Heat Treatment: 200~300°C





Temp. sensor

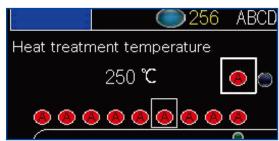

Operation panel

Machine Layout

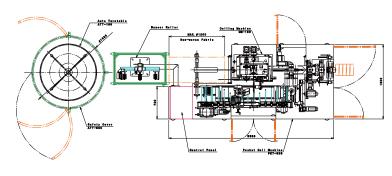

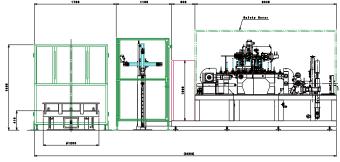

Specifications

Model	PKT320-CM150 Pocket Spring Machine Advanced
Speed	120 pcs/min.
Spring dia.	40-70 mm
Pocket height	100-210 mm
Wire gauge	1.2-2.2 mm (note*)
Non-woven fabric width	280-550mm
Electricity	200V, 40KVA
Air	20 I/min.(ANR) at 0.5MPa
Data	256 kinds of pocket spring size are possible to store in the machine and seved in USB flash drive.



(note*)

Wire gauge 1.0 mm is possible depending on the spring size.

(Example)

Center dia.: 35mm Spring height: 180mm Pocket heigt: 150mm