



TECMIC Cotton Pocket Spring Machine PKT-CT

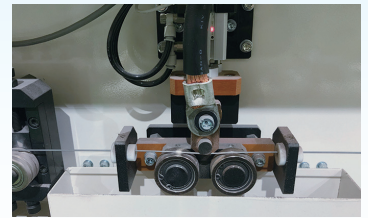

Wire Heat Treatment

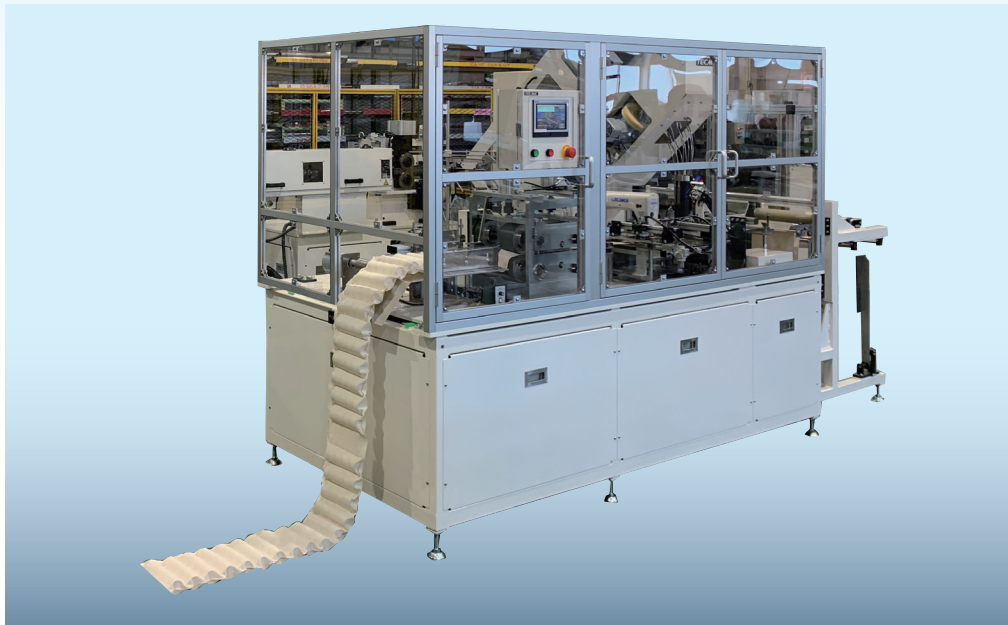

Heat Treatment Temperature Displayed



Cross & Lap Seal Sewing




Cotton Pocket Springs

Specifications

- Machine Speed : 60pcs/min
- Heat Treatment : Wire Heat Treatment (Pre-Heating)
- Wire Gauge : 1.2-1.7mm
- Spring Diameter : 50-60mm
- Pocket Height : According to the sewing length
- Sewing Length : Max.300mm (Lap length + Cross length)
- Sewing Pitch : 5.5mm
- Machine Power : 200V 45KVA
- Compressed Air : 0.5Mpa 200Lit/min (ANR)

TECMIC Cotton Pocket Assembling Machine PKTA-CT

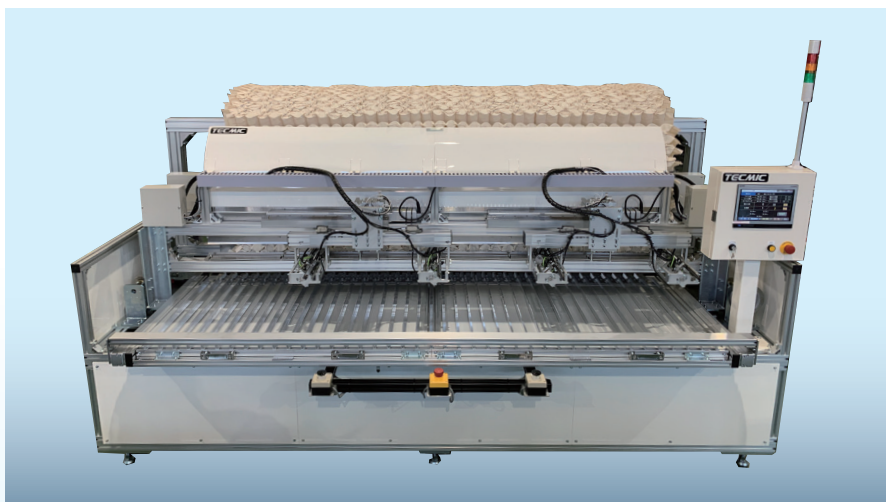

Specifications

- Capacity : 1 row/30 seconds
- C-ring Fastening Tool 8 sets
- C-ring Assembly in Nested Alignment
- Cotton Pocket Spring Size
- Spring Diameter : 50-60mm
- Pocket Height : 100-170mm
- Quantity :

- 60mm (70 pitch) Max34pcs
- 50mm (60 pitch) Max40pcs

Machine Power : 200V 3KVA

Compressed Air : 0.5Mpa 100Lit/min (ANR)



C-ring Clip



Cotton Pocket Unit