

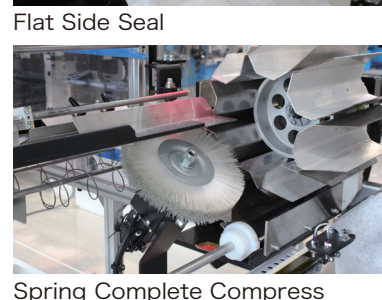
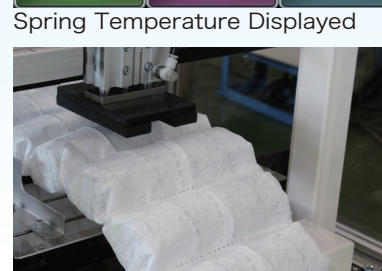
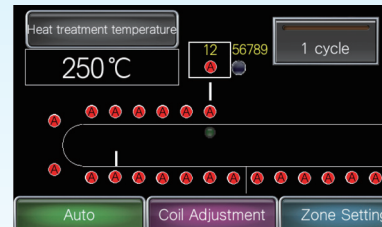


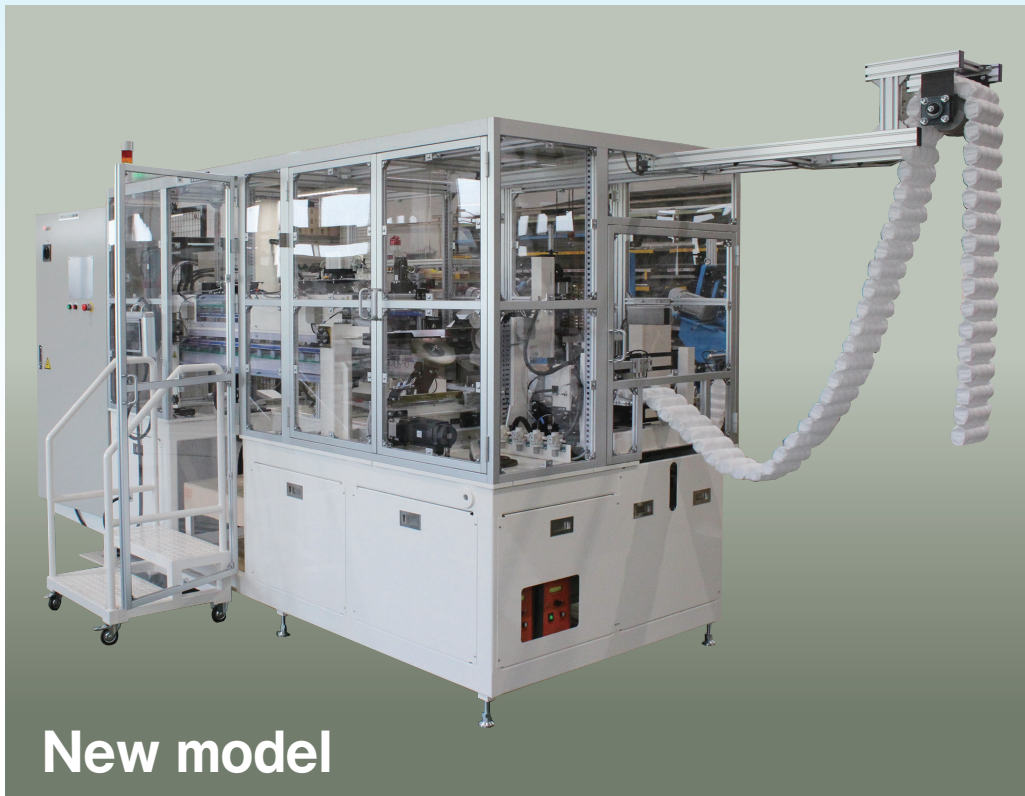

Characteristics

- Stable Speed: 120pcs/min (*Standard pocket size)
- Wire heat treatment (*Pre-Heating)
- Easy operation and maintenance
- Different pitch of double seal can be set on display (0-30mm)
- 256 kinds of pocket spring size data can be stored in the machine and served in USB flash

Machine Layout

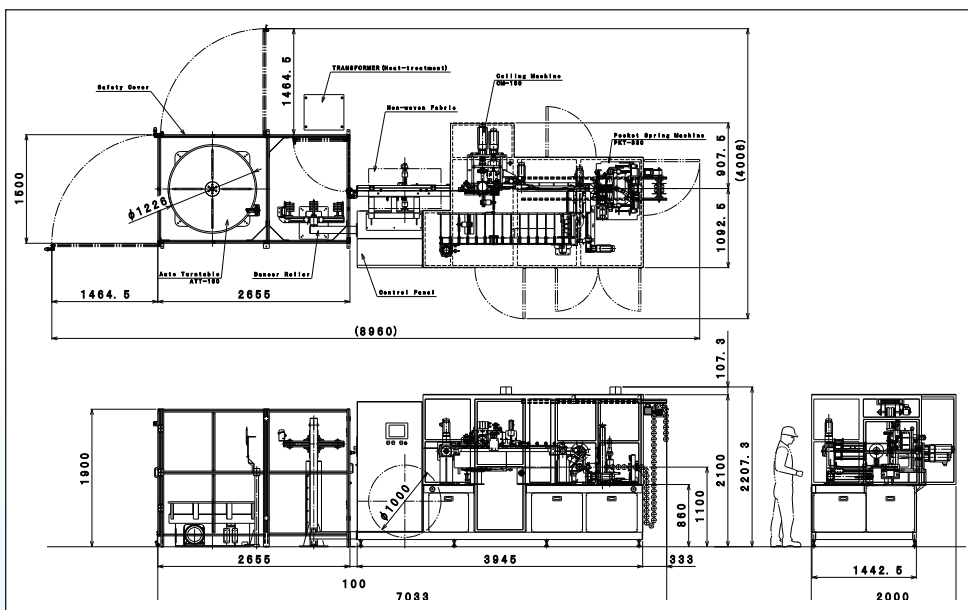

Specifications

- Speed : 120pcs/min (*Standard pocket size)
- Spring diameter : 40-70mm/1.57"-2.75"
- Pocket height : 100-210mm/3.93"-8.26"
- Wire gauge : 1.2-2.1mm
- Non-woven fabric width : 280-550mm/11.02"-21.65"
- Electricity : 200V 45KVA
- Air : 300L/min (ANR) 0.5MPA



Japan Made

Matsushita Industrial Co., Ltd.

Address: 7-1-24, Uehonmachi, Tennoji-ku, Osaka, Japan, Post code: 543-0001
TEL: +81-6-6774-6002 E-mail: info@tecmic.co.jp <https://www.tecmic.co.jp/en/>